
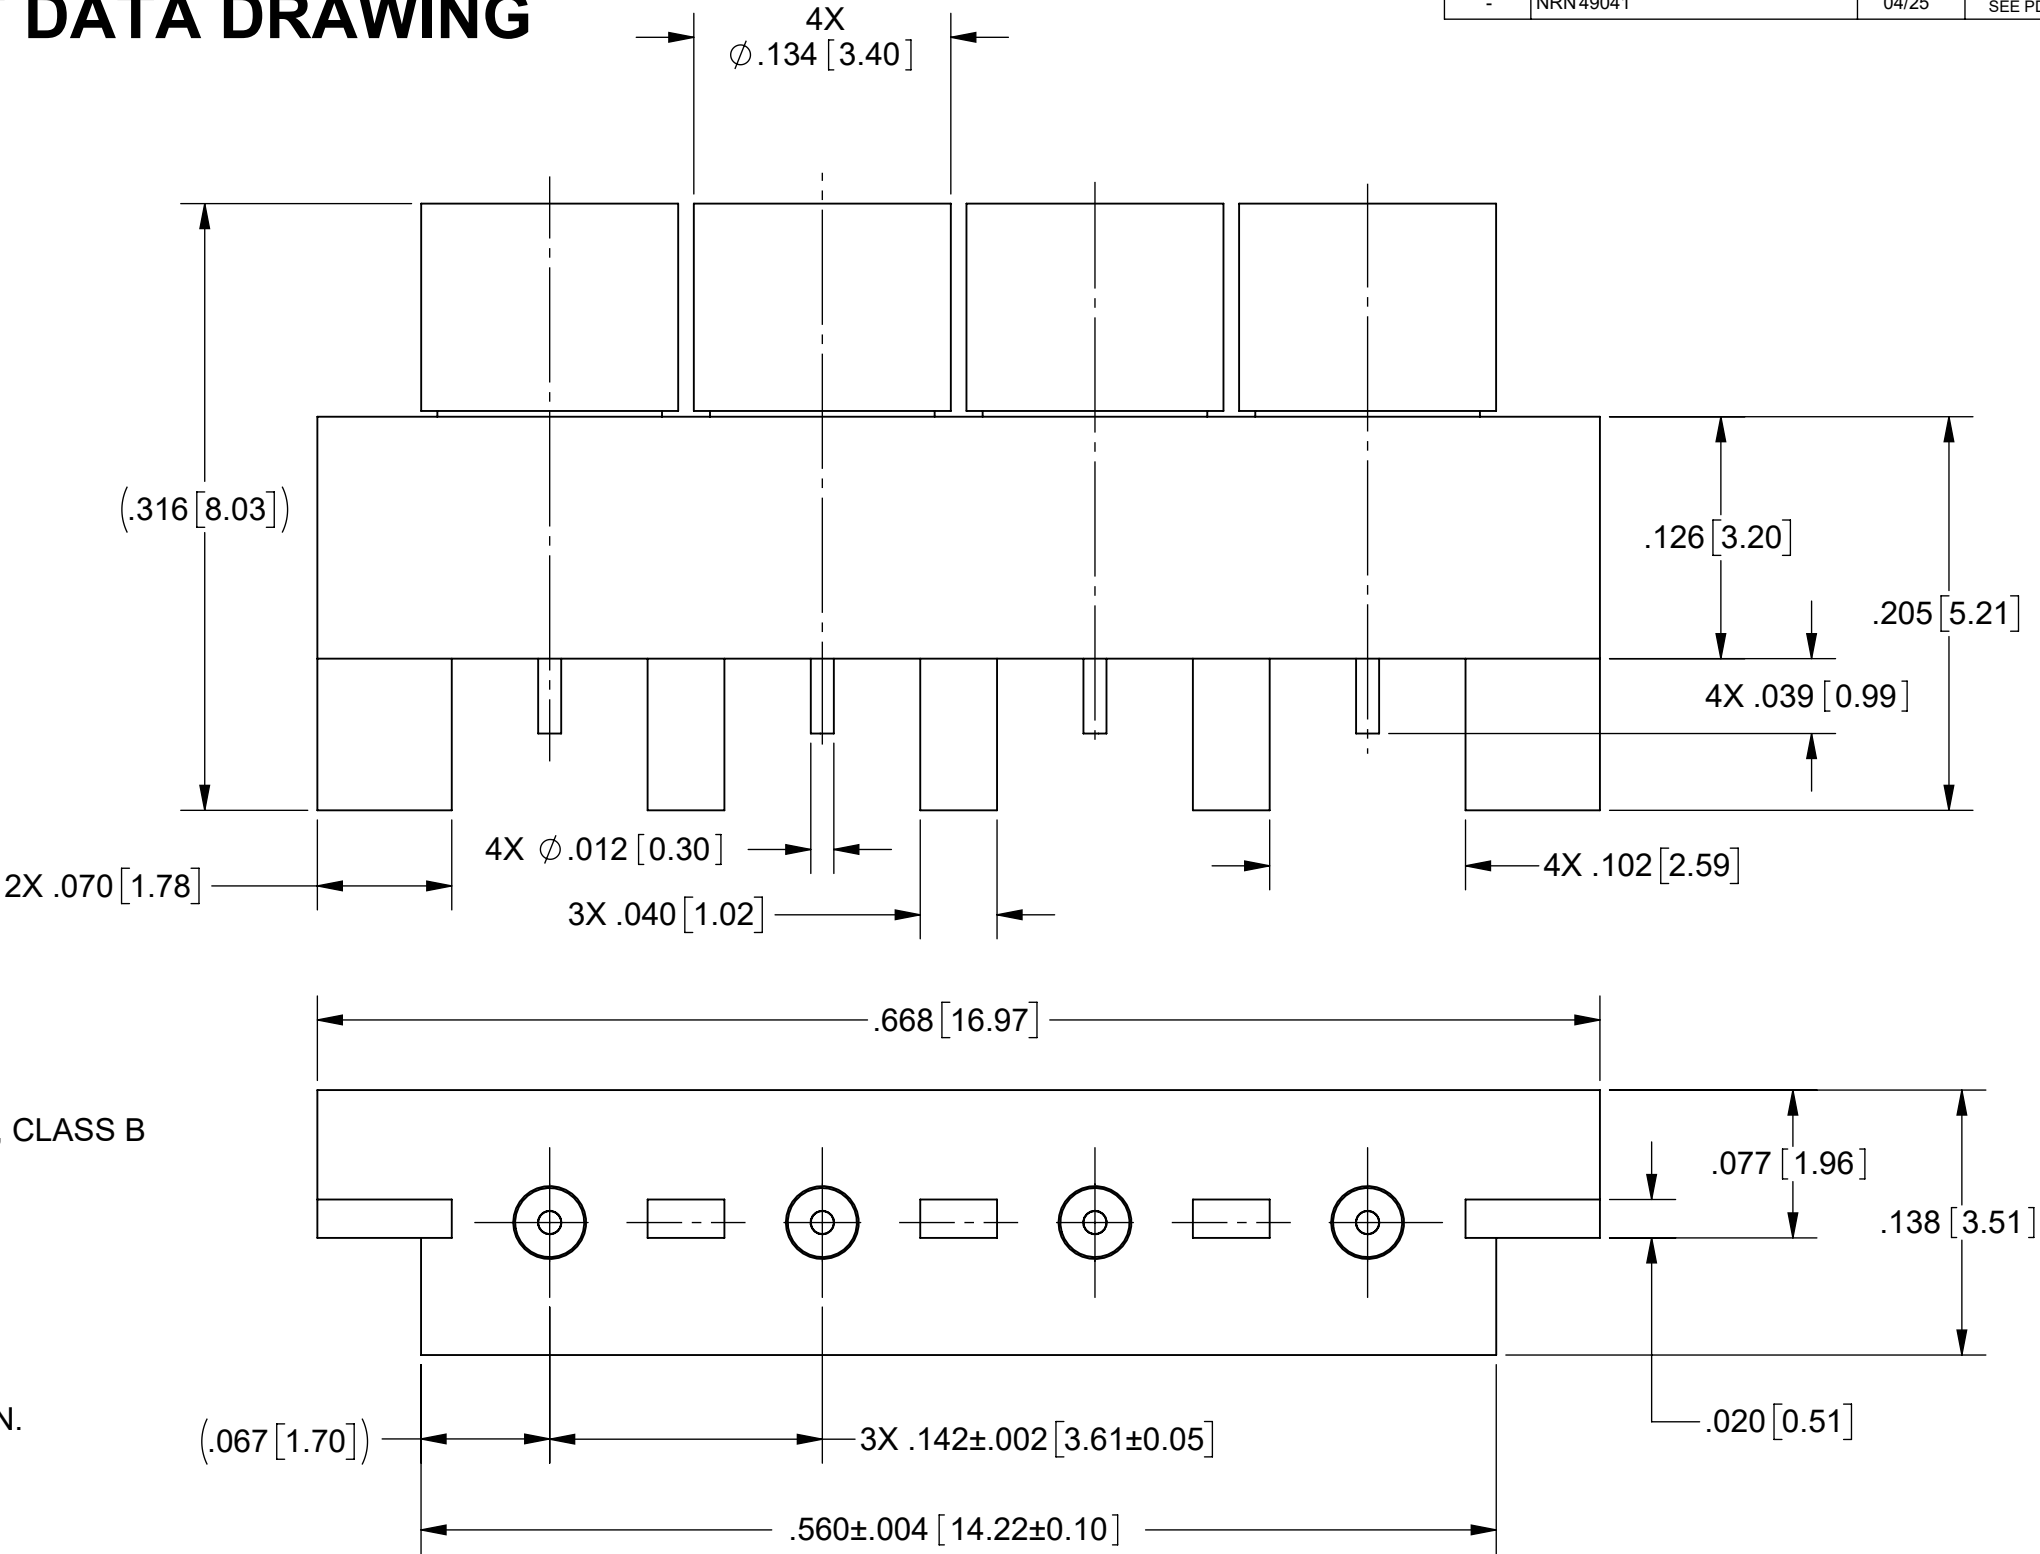


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 49041	04/25	SEE PDM

PRODUCT DATA DRAWING

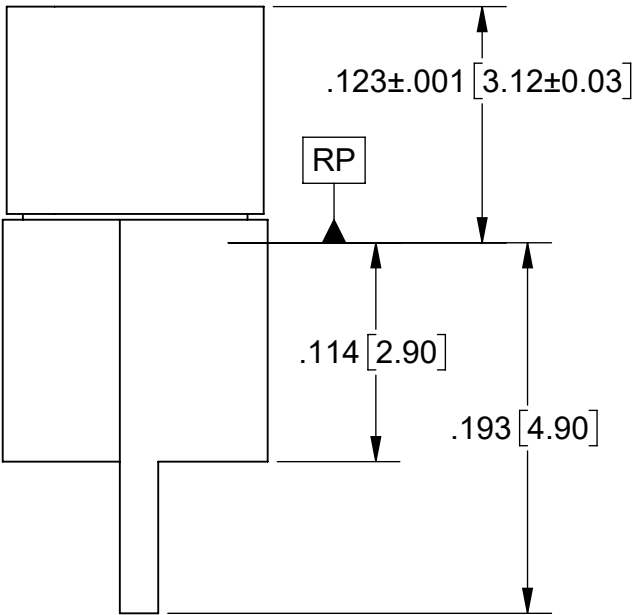

MATERIAL:

BODY & SHROUDS:	STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1
CONTACTS:	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
INSULATORS:	PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B
FINISH:	
BODY, SHROUDS, & CONTACTS:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 12.0 GHz

NOTES:

1. FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC PCB, CONTACT SV MICROWAVE SALES DEPARTMENT (sales@svmicro.com, 561-840-1800).
2. DESIGNED TO MATE WITH EXTENDED SMPM FEMALE CONNECTORS ONLY.

MATERIAL:	PER BOM	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	---------	--