


## PRODUCT DATA DRAWING



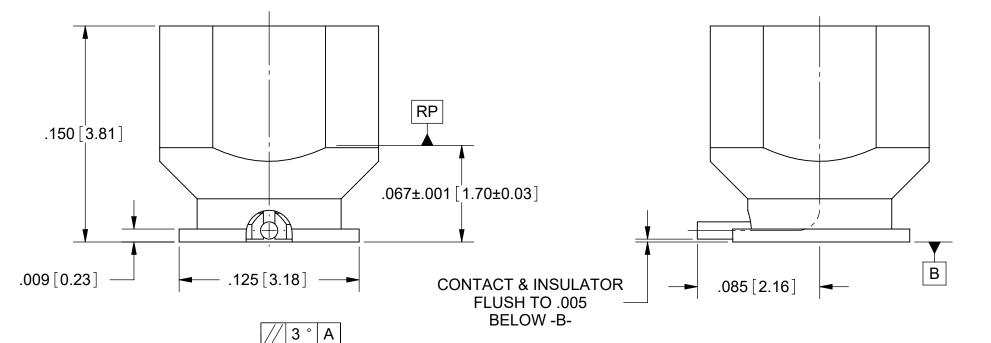

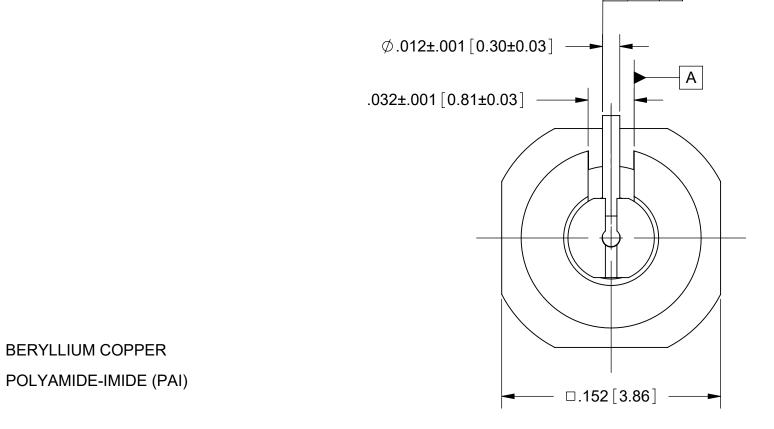

NOTES:

FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC PCB, CONTACT SV MICROWAVE SALES DEPARTMENT (sales@svmicro.com, 561-840-1800)

SCALE: 15:1

MATERIAL:	SEE NOTES
FINISH:	SEE NOTES
SURFACE AREA:	N/A
PR	OPRIETARY
IS THE SOLE PROP ANY REPRODUCTION	CONTAINED IN THIS DRAWING ERTY OF SV MICROWAVE, INC. DN IN PART OR AS A WHOLE TTEN PERMISSION OF IC IS PROHIBITED.

	DIMENSIONS ARE IN INCHES TOLERANCES:	
ł	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'	
	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED
1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES. 005 R. MAX. 4) CHAM. 15T & LAST THREADS. 5) SURFACE ROUGHNESS 63.MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS

SEE PDM

DRAWN:

CHECKED:

APPROVED:

SMPM MALE FD (NON-MAGNETIC) SURFÀCE PC MOUNT WITH R/A CONTACT KRR 06/11/20 3211-40119 SEE PDM

MICROWAVE

<.1 mG

**BODY & CONTACT: PERFORMANCE:** 

BODY, CONTACT:

**MATERIAL:** 

**INSULATOR:** 

FINISH:

IMPEDANCE: FREQ. RANGE: MAGNETIC FIELD

50 OHMS DC TO 20.0 GHz.

GOLD OVER COPPER

STRENGTH: