

PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	NRN 44864	05/20		
Α	DCN 52177	02/23	SEE PDM	

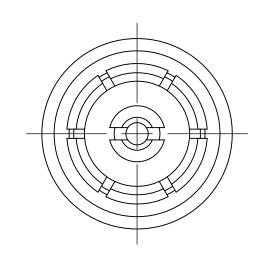

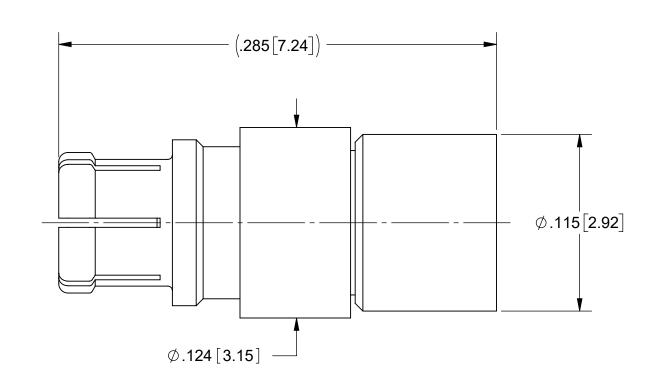

MATERIAL:

BODY, FERRULE, & CONTACT:

BERYLLIUM COPPER

INSULATOR: PTFE

FINISH:

BODY, CONTACT & FERRULE:

FERRULE: GOLD OVER COPPER

PERFORMANCE:

IMPEDANCE: FREQ. RANGE: MAGNETIC FIELD 50 OHMS DC TO 40.0 GHz.

STRENGTH:

<.1 mG

MATERIAL:	SEE NOTES			
FINISH:	SEE NOTES			
SURFACE AF	URFACE AREA: N/A			
PROPRIETARY				
IS THE SOLE I ANY REPROD WITHOUT THE	ATION CONTAINED IN THIS DRAWIN PROPERTY OF SV MICROWAVE, IN UCTION IN PART OR AS A WHOLE E WRITTEN PERMISSION OF VE INC IS PROHIBITED			

	DIMENSIONS ARE IN INCHES TOLERANCES:
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
	DECIMAL: .X ±.030 .XX +.010
	.XXX ±.005
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994
;	THIRD ANGLE PROJECTION

2) ALL DIMENSIONS ARE AF: 3) BREAK CORNERS & EDGE 4) CHAM. 1ST & LAST THREA: 5) SURFACE ROUGHNESS 6 6) DIA.'S ON COMMON CENT WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	ES ,005 R. MAX. 1005 R. MAX. 3-MIL-STD-10. ERS TO BE CONCENTRIC
I DRAWN:	S.I.05/27/20

CHECKED:

APPROVED:

UNLESS OTHERWISE SPECIFIED

SEE PDM

SEE PDM

	MICROWAVE www.svmicrowave.com	
ΓLE:	·	

SMPM JACK (NON-MAGNETIC) FOR .085 CABLE

SIZE DWG. NO. 3221-40132

SCALE: 16:1 SHEET 1 OF 1

IN PART OR AS A WHOLE
EN PERMISSION OF
IS PROHIBITED.