
PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
В	DCN 57286	06/25	
			SEE PDM

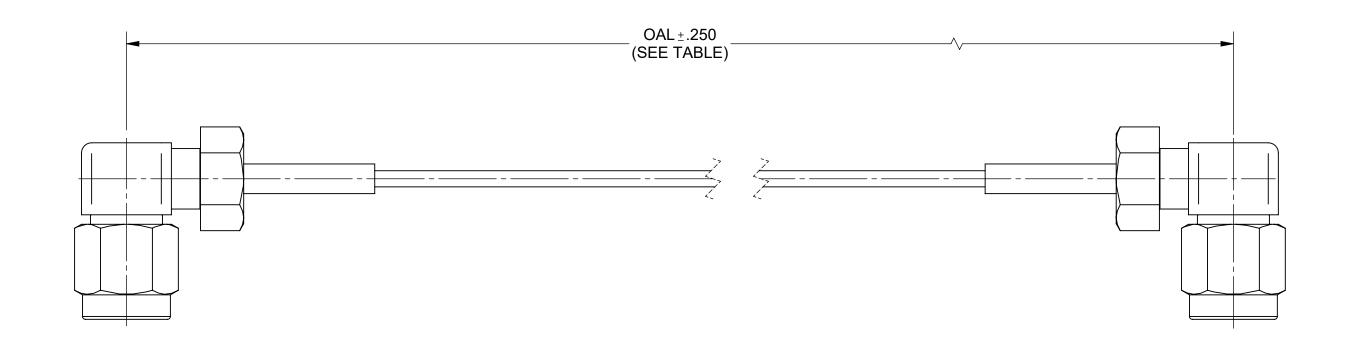

MATERIAL:

CONNECTORS: 2X 2.92mm MALE R/A (SF1512-60028)

CABLE: FLEXIBLE Ø.047 CABLE (200-70-214)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 40.0 GHz

				SV P/N	OAL	
			70	15-0990	6.000	
			70	15-0991	12.000	
SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIE	ED	5	Amphenol	

MATERIAL: SEE NOTES			D F
FINISH:	SEE NOTES		D
SURFACE AREA	^{A:} N/A		11
PROPRIETARY			Р
	ON CONTAINED IN THIS DRAWIN OPERTY OF SV MICROWAVE. IN		
ANY REPRODUC WITHOUT THE W	OPERTY OF SV MICROWAVE, INC TION IN PART OR AS A WHOLE /RITTEN PERMISSION OF , INC IS PROHIBITED.	J.	

DECIMAL: X ±.030 .XX ±.010 .XX ±.010 .XX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	1) ALL DIMENSIONS ARE IN 2) ALL DIMENSIONS ARE AF 3) BREAK CORNERS & EDG 4) CHAM, 1ST & LAST THE 5) SURFACE ROUGHNESS 6) DIA: S ON COMMON CEN WITHIN 005 T.I.R. 7) REMOVE ALL BURRS	FTER PLATING. ES .005 R. MAX. ADS. 53 _° MIL-STD-10.
THIRD ANGLE PROJECTION	DRAWN:	SJ 01/22/20

D ANGLE PROJECTION	DRAWN:	SJ 01/22/20
	CHECKED:	SEE PDM
\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	APPROVED:	SEE PDM

www.symicrowave.com					
TITLE: 2.92mm R/A MALE TO 2.92mm					
R/A MALE Ø.047 CABLE					
ASSEMBLY					

SIZE B	DWG. NO.	7015-099	0-0991
S	CALE: 3:1		SHEET 1 OF 1