


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46496	06/18	GPF
A	DCN 47720	07/18	STW
B	DCN 50572	02/21	STW

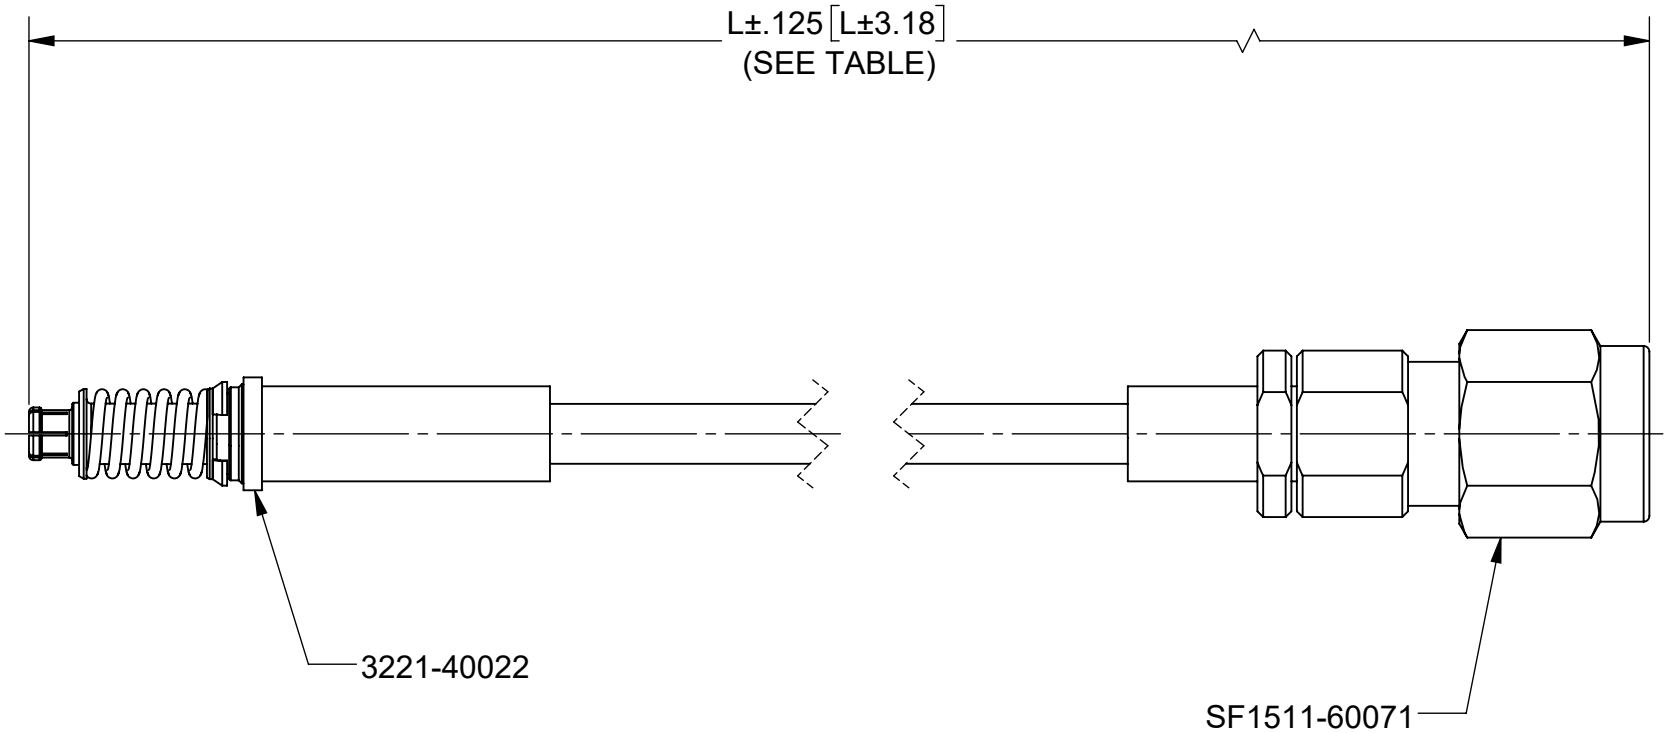

MATERIAL:

CONNECTORS: SMPM STRAIGHT FEMALE (3221-40022)
2.92mm STRAIGHT MALE (SF1511-60071)



CABLE: T-FLEX 405 (200-70-139)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 40.0 GHz.

SV P/N	L
7032-7162	6.000"
7032-7163	12.000"
7032-7164	24.000"

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:		UNLESS OTHERWISE SPECIFIED		<div> www.svmicrowave.com</div>	
FINISH:	SEE NOTES	FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$ X°X' $\pm 15'$		1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS			
SURFACE AREA: N/A		DECIMAL: .X $\pm .030$.XX $\pm .010$.XXX $\pm .005$				TITLE: SMPM FEMALE TO 2.92mm MALE FOR .085 CABLE ASSEMBLY	
PROPRIETARY		INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994		THIRD ANGLE PROJECTION		DRAWN: VB 06/05/17	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.				DRAWN: VB 06/05/17		SIZE DWG. NO. 7032-7162-7164	
				CHECKED: GPF 06/05/17			
				APPROVED: GPF 06/05/17		SCALE: 3:1	
						SHEET 1 OF 1	