


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B	DCN 57587	08/25	SEE PDM

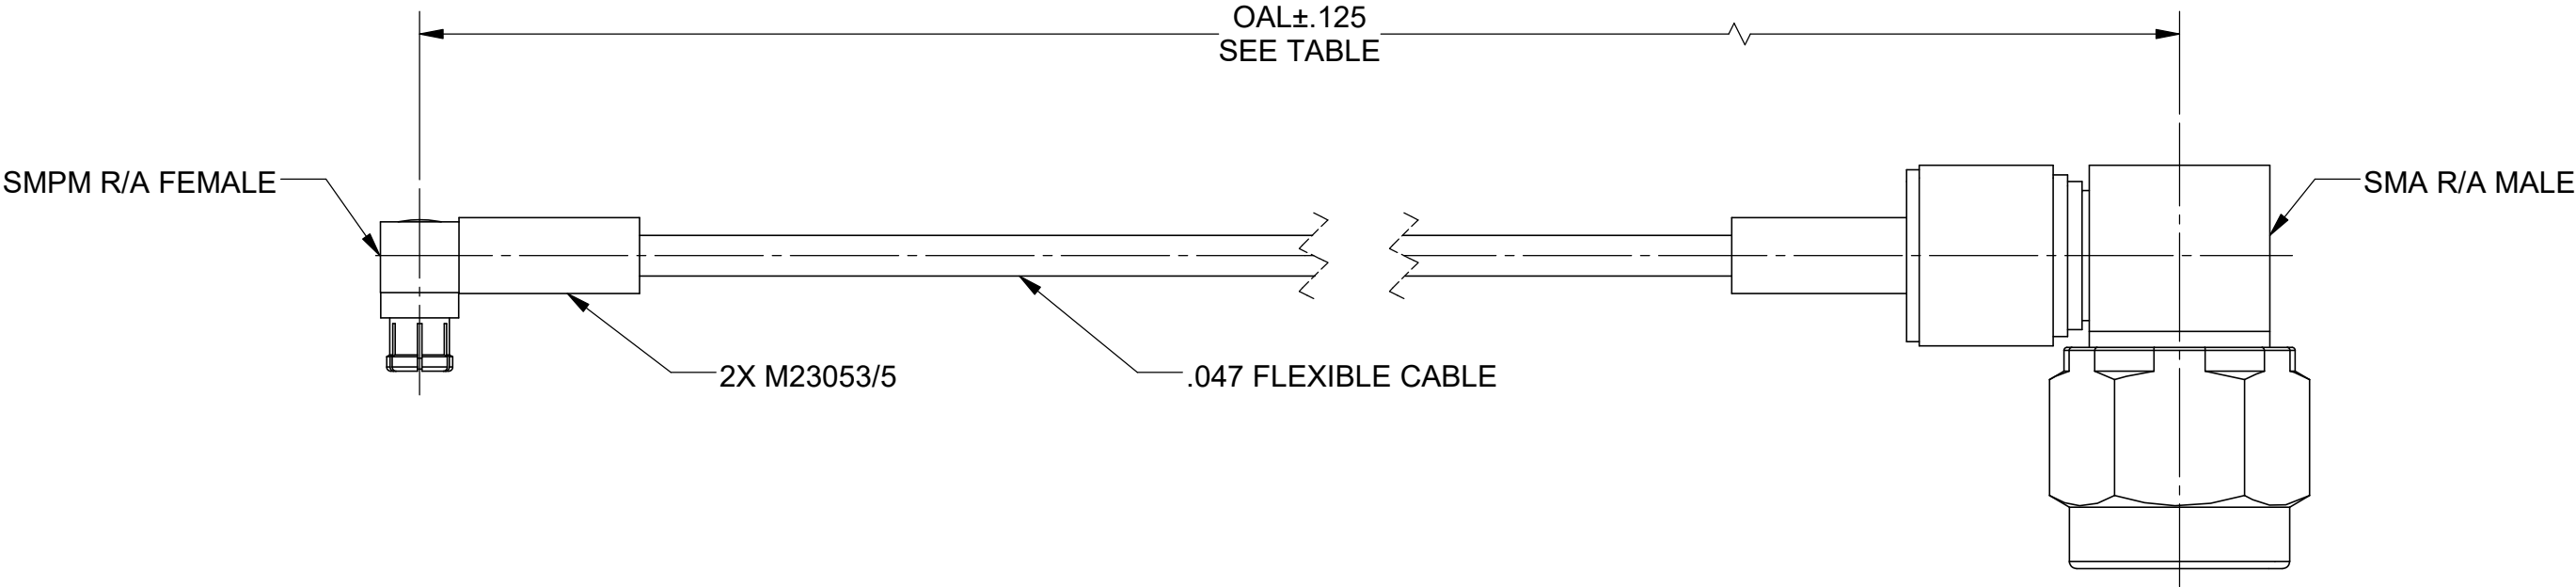

MATERIAL:

CONNECTORS:	SMA MALE (SF2912-60955), SMPM FEMALE (3269-4001)
CABLE:	FLEXIBLE Ø.047 CABLE (200-70-479)
SHRINK TUBING:	M23053/5

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 18 GHz
VSWR:	1.40:1 MAX, DC TO 18 GHz
INSER. LOSS:	SEE TABLE

TABLE 1		
SV P/N	OAL	MAX INSER. LOSS
7032-7237	6.000	1.30 dB
7032-7238	12.000	2.18 dB
7032-7239	24.000	3.94 dB

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: X ±.030 .XX ±.010 .XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM: 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	<div>SV MICROWAVE</div> <div>Amphenol</div> <div>www.svmicrowave.com</div> <div>TITLE: SMPM R/A FEMALE TO SMA R/A MALE FOR Ø.047 FLEXIBLE CABLE</div>	
FINISH: SEE NOTES				
SURFACE AREA: N/A	THIRD ANGLE PROJECTION 	DRAWN: DEF 05/07/18 CHECKED: SEE PDM APPROVED: SEE PDM	SIZE DWG. NO.	7032-7237-7239
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.			SCALE: 1:2	SHEET 1 OF 1