
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
-	NRN 42265	05/18	STW		
Α	DCN 47843	8/18	STW		

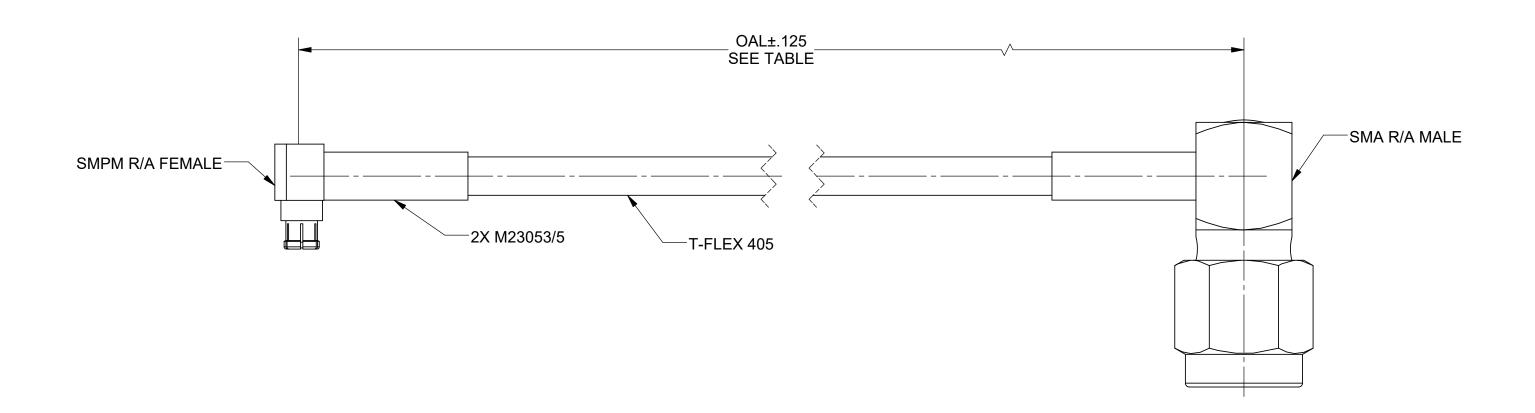

MATERIAL:

SMA MALE (SF2915-6001), SMPM FEMALE (3222-40002) CONNECTORS:

CABLE: T-FLEX 405

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 12.4 GHz

VSWR: 1.60:1 MAX, DC TO 12.4 GHz

INSER. LOSS: SEE TABLE

MATERIAL: SEE NOTES				
FINISH: SEE NOTES				
SURFACE AREA: N/A				
PROPRIETARY				
THE INFORMATION CONTAINED IN THIS DRAWIN IS THE SOLE PROPERTY OF SV MICROWAVE, IN ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.				

	DIMENSIONS ARE IN INCHES TOLERANCES:				
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'				
	DECIMAL: X ±.030 .XX ±.010 .XXX ±.005				
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994 THIRD ANGLE PROJECTION				

NAL: ±1/64 ANGULAR: X° ±1°0′ X°X′ ±15′ .X ±.030 .XX ±.010 .XXX ±.005 ET DIMENSIONS AND TOLERANCES E Y14.5M - 1994	1) ALL DIMENSIONS ARE IN IN 2) ALL DIMENSIONS ARE AFT 3) BREAK CORNERS & EDGE 4) CHAM. 1ST & LAST THREAI 5) SURFACE ROUGHNESS 63 6) DIA: SO N COMMON CENTE WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	S .005 R. MAX. DS. _e MIL-STD-10.
ANGLE PROJECTION	DRAWN:	DEF 05/07/18
	CHECKED:	STW 05/07/18
\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	APPROVED:	STW 05/07/18

			TABLE 1	
	SV P/N		OAL	MAX INSER. LOSS
	7032-7240		6.000	0.85 dB
	7032-7241		12.000	1.27 dB
	7032-7242		24.000	2.12 dB
Į	JNLESS OTHERWISE SPECIFI	ED	5	Amphenol

MICROWAVE

SMPM R/A FEMALE TO SMA R/A MALE FOR T-FLEX 405

SIZE DWG. NO. 7032-7240-7242 SHEET 1 OF 1 SCALE: 1:2