
PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
В	DCN 57349	06/25	
			SEE PDM

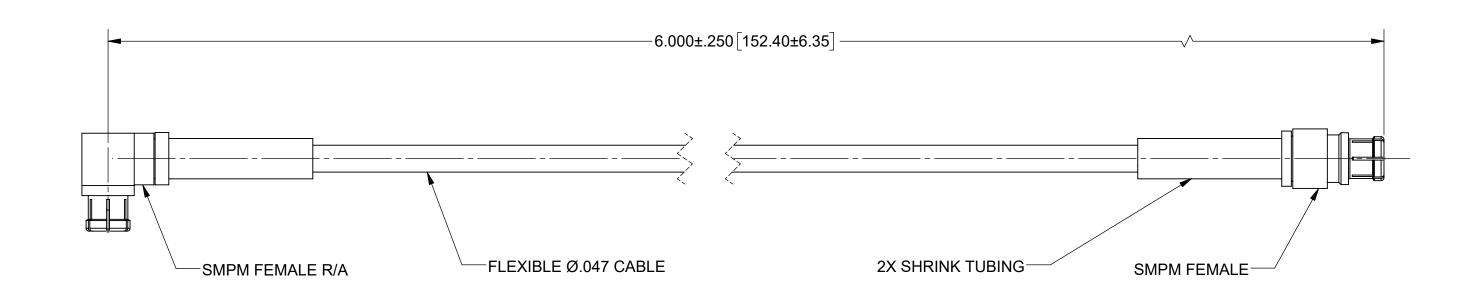

COMPONENTS:

SMPM FEMALE R/A (3222-40006) **CONNECTORS**:

SMPM FEMALE (3221-40007)

FLEXIBLE Ø.047 CABLE (200-70-214) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: FREQ. RANGE: 50 OHMS DC TO 40.0 GHz.

	DIMENSIONS ARE IN INCHES TOLERANCES:
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0 X°X' +15'
	DECIMAL: .X ±.030 .XX +.010
-	.AA ±.010

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION				
4				

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING,
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

DRAWN: KRR 05/10/23 CHECKED: SEE PDM APPROVED: SEE PDM



TITLE: SMPM FEMALE R/A TO SMPM FEMALE 6" CABLE ASSEMBLY FOR Ø.047 CABLE

SIZE DWG. NO. 7032-9731