



## PRODUCT DATA DRAWING



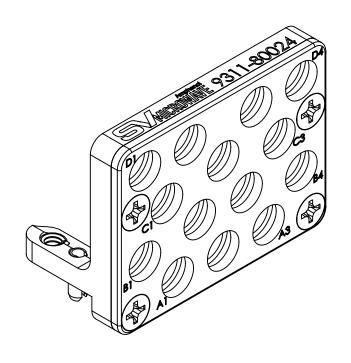

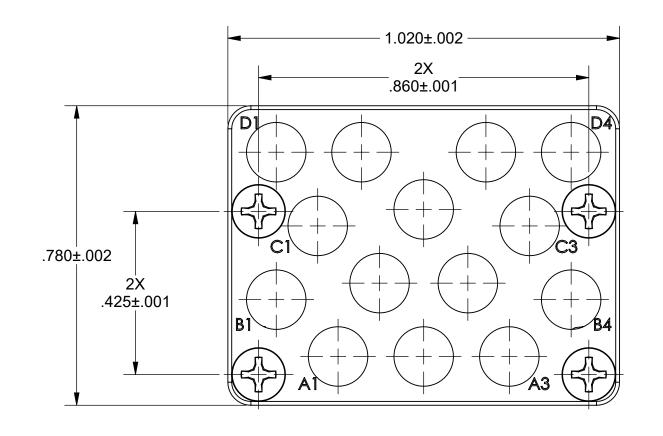

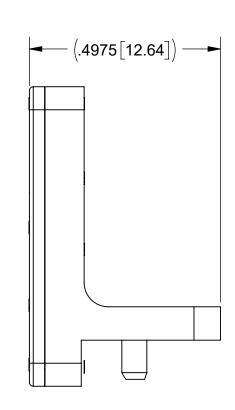

# **MATERIAL:**

**BODIES**: **ALUMINUM ALLOY 7075** 

**SPRING PIN:** 420 STAINLESS STEEL

SCREWS &

THREADED INSERTS: 18-8 STAINLESS STEEL

#### NOTES:

- MATES TO BACKPLANE MODULE: SF9321-60086 OR 9321-80035.
- POPULATE WITH ADAPTER CONTACT (1132-6116) OR CABLE CONTACTS (Ø.086 3211-60350 & Ø.047 3211-60351). 2.
- REMOVAL TOOL FOR Ø.086 AND Ø.047 CABLE CONTACTS: 500-32-044.
- ADAPTER CONTACT REMOVAL ONLY REQUIRES REMOVAL OF FRONT PLATE PHILIPS HEAD SCREWS.

.121±.002[3.06±0.05] (.744[18.90]) 	(.272[6.91]) (.393[9.97]) —.137±.002[3.48±0.05] —2X 2-56 UNC-2B THRU
---	---

APPROVED:

	MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	
ŀ	FINISH:	SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX +.010	
	SURFACE AREA: N/A		.XXX ±.005  INTERPRET DIMENSIONS AND TOLERANCES	
	F	PROPRIETARY	PER ASME Y14.5M - 1994	
		ON CONTAINED IN THIS DRAWING OPERTY OF SV MICROWAVE, INC.	THIRD ANGLE PROJECTION	
	ANY REPRODUC WITHOUT THE V	VELTE OF SV MICHOWAVE, INC. VELTION IN PART OR AS A WHOLE VRITTEN PERMISSION OF I, INC IS PROHIBITED.	<b>⊕</b> <del>€</del> -}	

MATERIAL:

.XX ±.010 .XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	4) CHAM. 1ST & LAST 5) SURFACE ROUGHN 6) DIA.'S ON COMMON WITHIN .005 T.I.R. 7) REMOVE ALL BURR
THIRD ANGLE PROJECTION	DRAWN:
	CHECKED:

DIMENSIONS ARE IN INCHES TOLERANCES:

UNLESS OTHERWISE SPECIFIED
1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THIREADS. 5) SURFACE ROUGHNESS 63.MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS

JPM 09/02/21

SEE PDM


SEE PDM


MICROWAVE TITLE:

VITA 67.3 PLUG-IN MODULE
C, 14 PORT, SMPM

SIZE <b>B</b>	DWG. NO.	9311-8	9311-80024		
S	CALE: 4:1		SHEET 1 OF 2		

# CUI BASIC PRODUCT DATA DRAWING



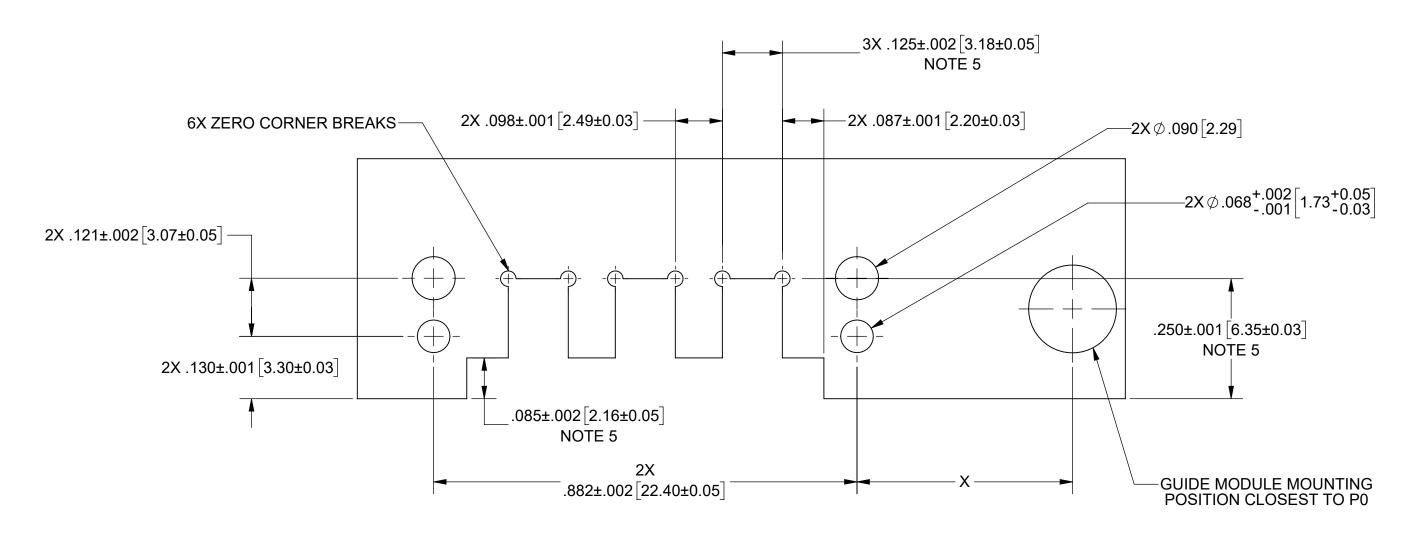

### **RECOMMENDED PCB CUTOUT**

CONNECTOR LOCATION ON DAUGHTER CARD PCB			
POSITION	DIM 'X'		
P2	2.144" [54.46]		
P3	3.701" [94.01]		
P4	5.035" [127.89]		
P5	6.168" [156.67]		
P6	7.316" [185.83]		

NOTES

5. DIMENSIONS WHEN USING 3211-60035 EDGE LAUNCH CONNECTOR.

MATERIAL: SEE NOTES FINISH: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:  FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'	1) ALL DIMENSIONS ARE IN I 2) ALL DIMENSIONS ARE AF 3) BREAK CORNERS & EDGE	S .005 R. MAX.	5	MICROWAVE www.symicrowave.com		
SURFACE AREA: N/A PROPRIETARY	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .004 T.I.R. 7) REMOVE ALL BURRS		VITA 67.3 PLUG-IN MODULE C,			
THE INFORMATION CONTAINED IN THIS DRAWING	THIRD ANGLE PROJECTION	DRAWN:	JPM 09/02/21				
IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF		CHECKED:	SEE PDM	B DWG. NO.	9311-6022	6	
SV MICROWAVE, INC IS PROHIBITED.		APPROVED:	SEE PDM	SCALE: 5:1		SHEET 2 OF 2	