
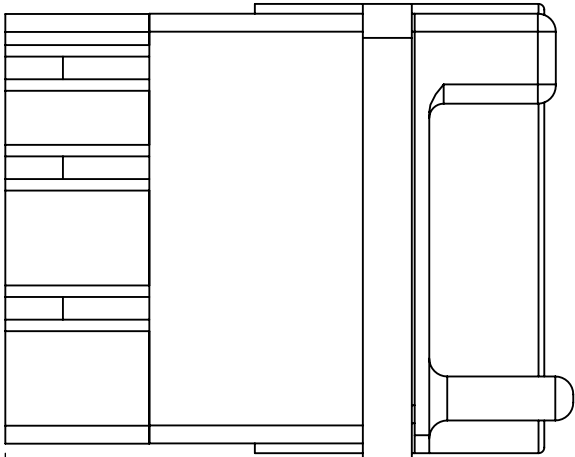


PRODUCT DATA DRAWING


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
C	DCN 54228	4/24	SEE PDM

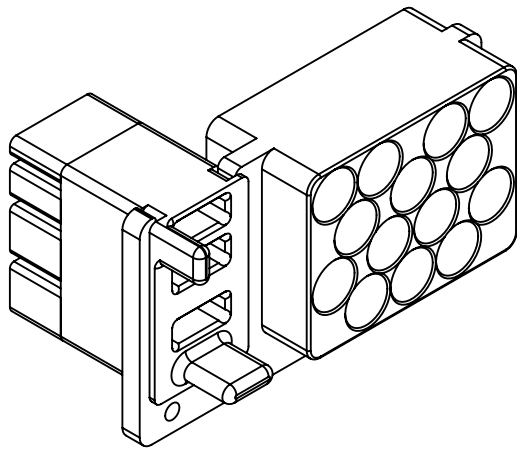

(.621 [15.77])

.085±.002 [2.16±0.05]

2X
Ø .6750±.0015 [1.71±0.04]
SPRING PIN

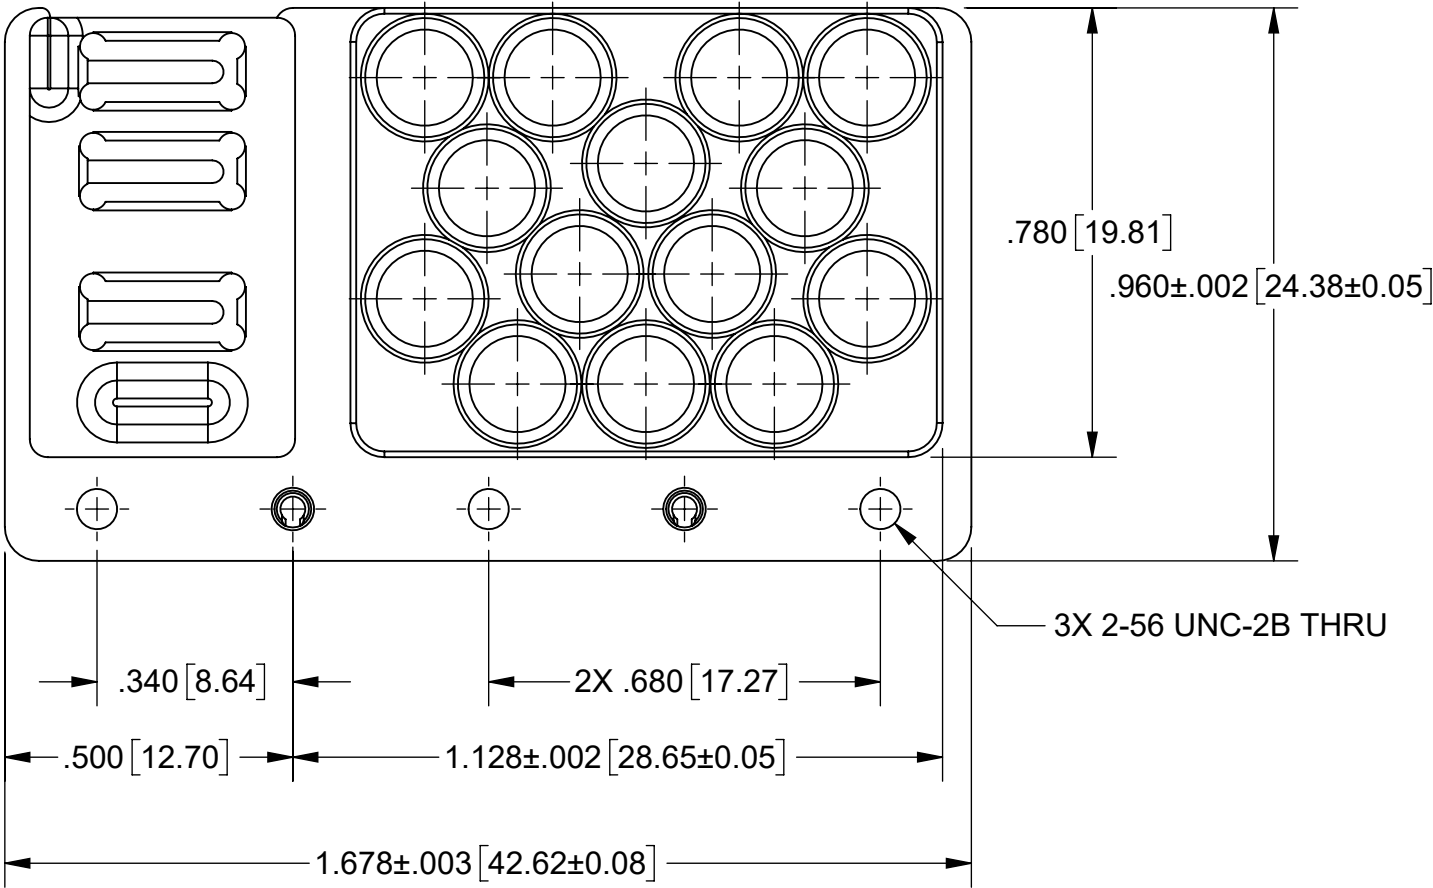

MATERIAL:

BLOCK & RETAINERS: STAINLESS STEEL PER AMS-5640,ALLOY UNS S30300, TYPE 1; OR ASTM A582 TYPE 303, COND. A



SPRING PINS: 420 STAINLESS STEEL

SCREWS: 18-8 STAINLESS STEEL

FINISH:


BLOCK & RETAINERS: PASSIVATED PER AMS-2700

- NOTES:
1. COMPLIANT TO VITA 67.3, 66.5, & VITA 65.1 SECTION 6.4.5.8.7 AND ALIGNED TO THE SOSA TECHNICAL STANDARD.
 2. DESIGNED FOR USE WITH 3221-40066, 3221-40071, & SIMILAR COAX CONTACTS.
 3. SHIPPED WITHOUT MT FERRULE KIT.
 4. MATES TO SV P/N 9311-60215.



MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIED	 www.svmicrowave.com	
FINISH:	SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'	1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS		
SURFACE AREA:	N/A	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	TITLE: SMPM VITA 66.5 14 PORT RF AND 3 PORT MT FIBER BACKPLANE HYBRID MODULE	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION	DRAWN: KRR 12/08/20	SIZE DWG. NO.	9321-60109
			CHECKED: SEE PDM APPROVED: SEE PDM	SCALE: 3:1	SHEET 1 OF 2

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
C	DCN 54228	4/24	SEE PDM

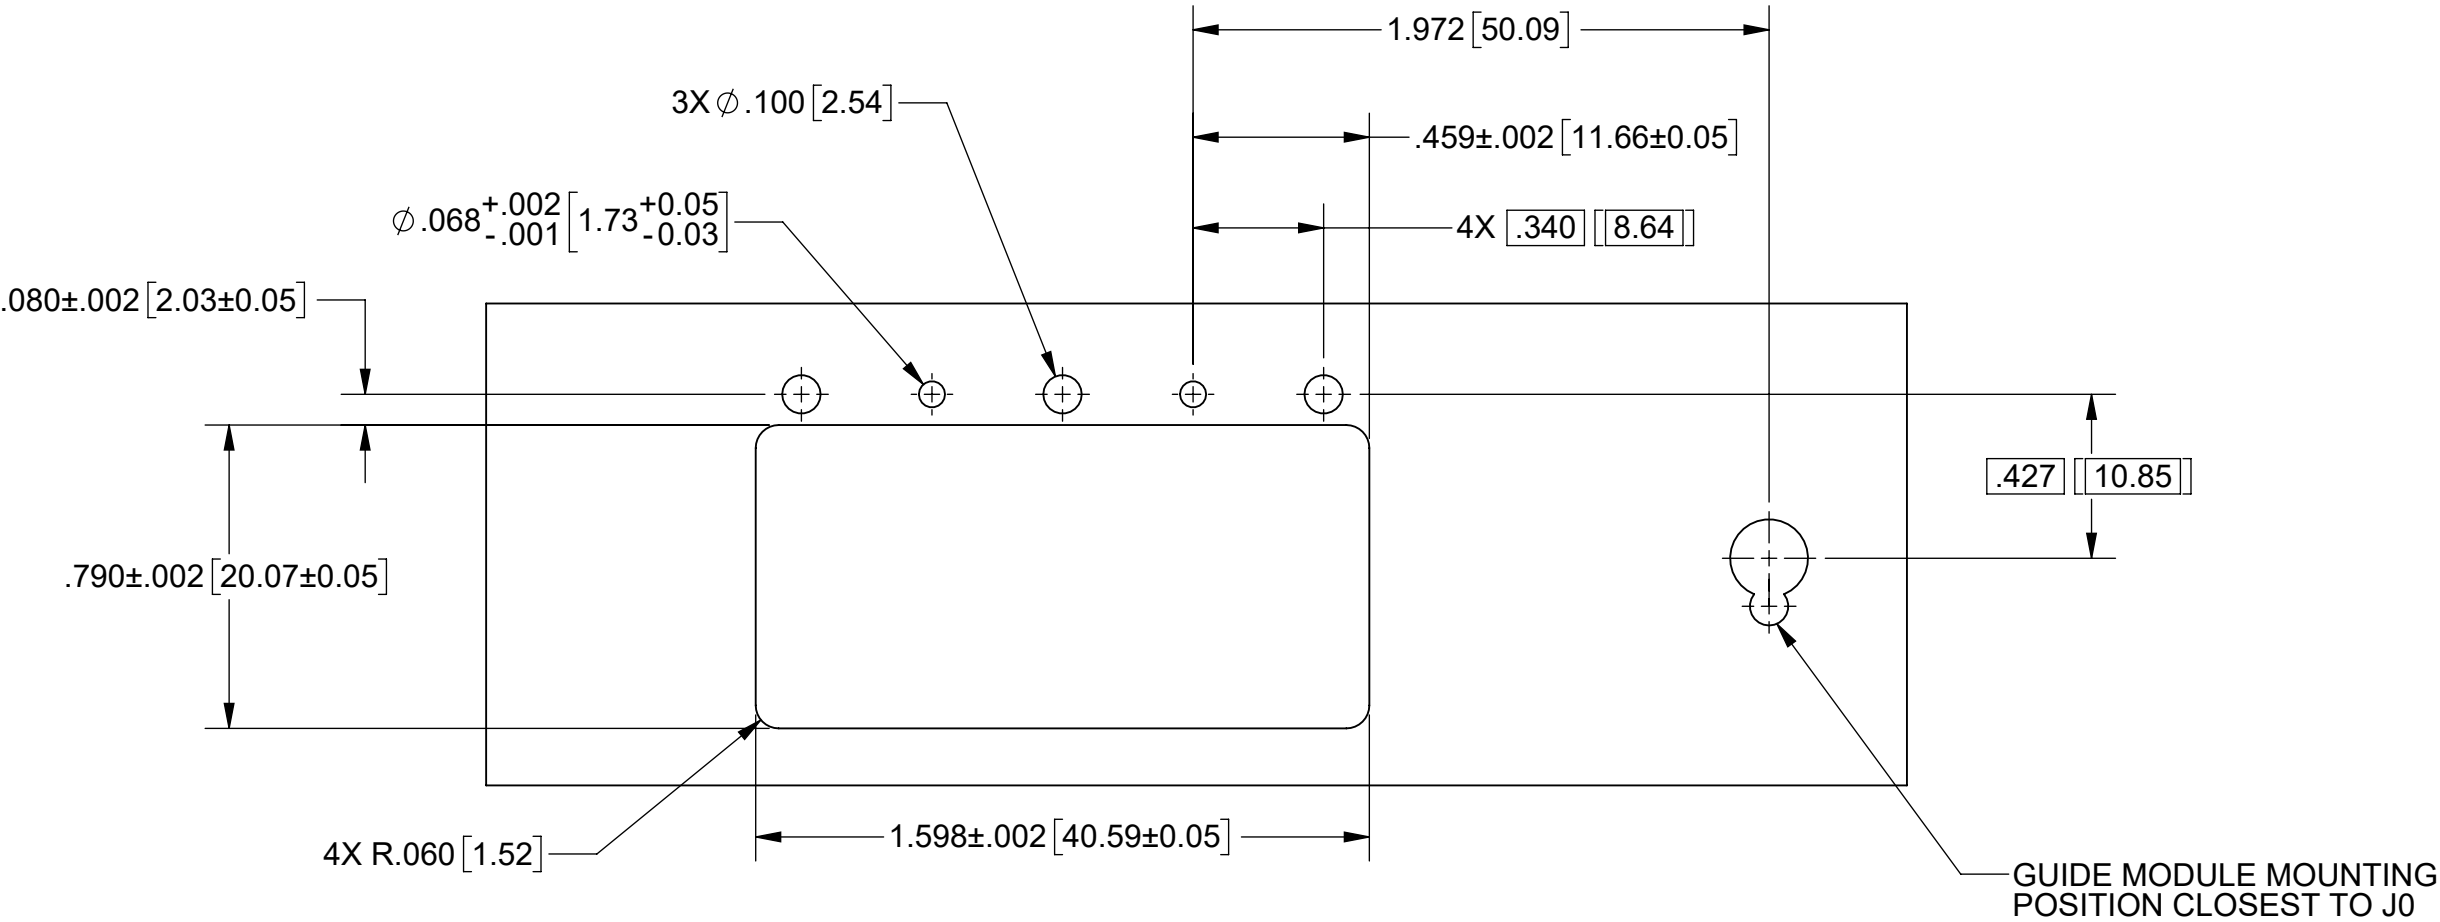

RECOMMENDED PCB CUTOUT

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1'0''$ X°X' $\pm 15'$ DECIMAL: .X $\pm .030$.XX $\pm .010$.XXX $\pm .005$ INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	 www.svmicrowave.com	
FINISH:	SEE NOTES			TITLE: SMPM VITA 66.5 14 PORT RF AND 3 PORT MT FIBER BACKPLANE HYBRID MODULE	
SURFACE AREA:	N/A			SIZE B	DWG. NO. 9321-60109
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION	DRAWN: KRR 12/08/20	SCALE: 2:1	
			CHECKED: SEE PDM APPROVED: SEE PDM		
				SHEET 2 OF 2	