

REV	DESCRIPTION	DATE	APPROVED
C	DCN 60300	07/26	SEE PDM

PRODUCT DATA DRAWING

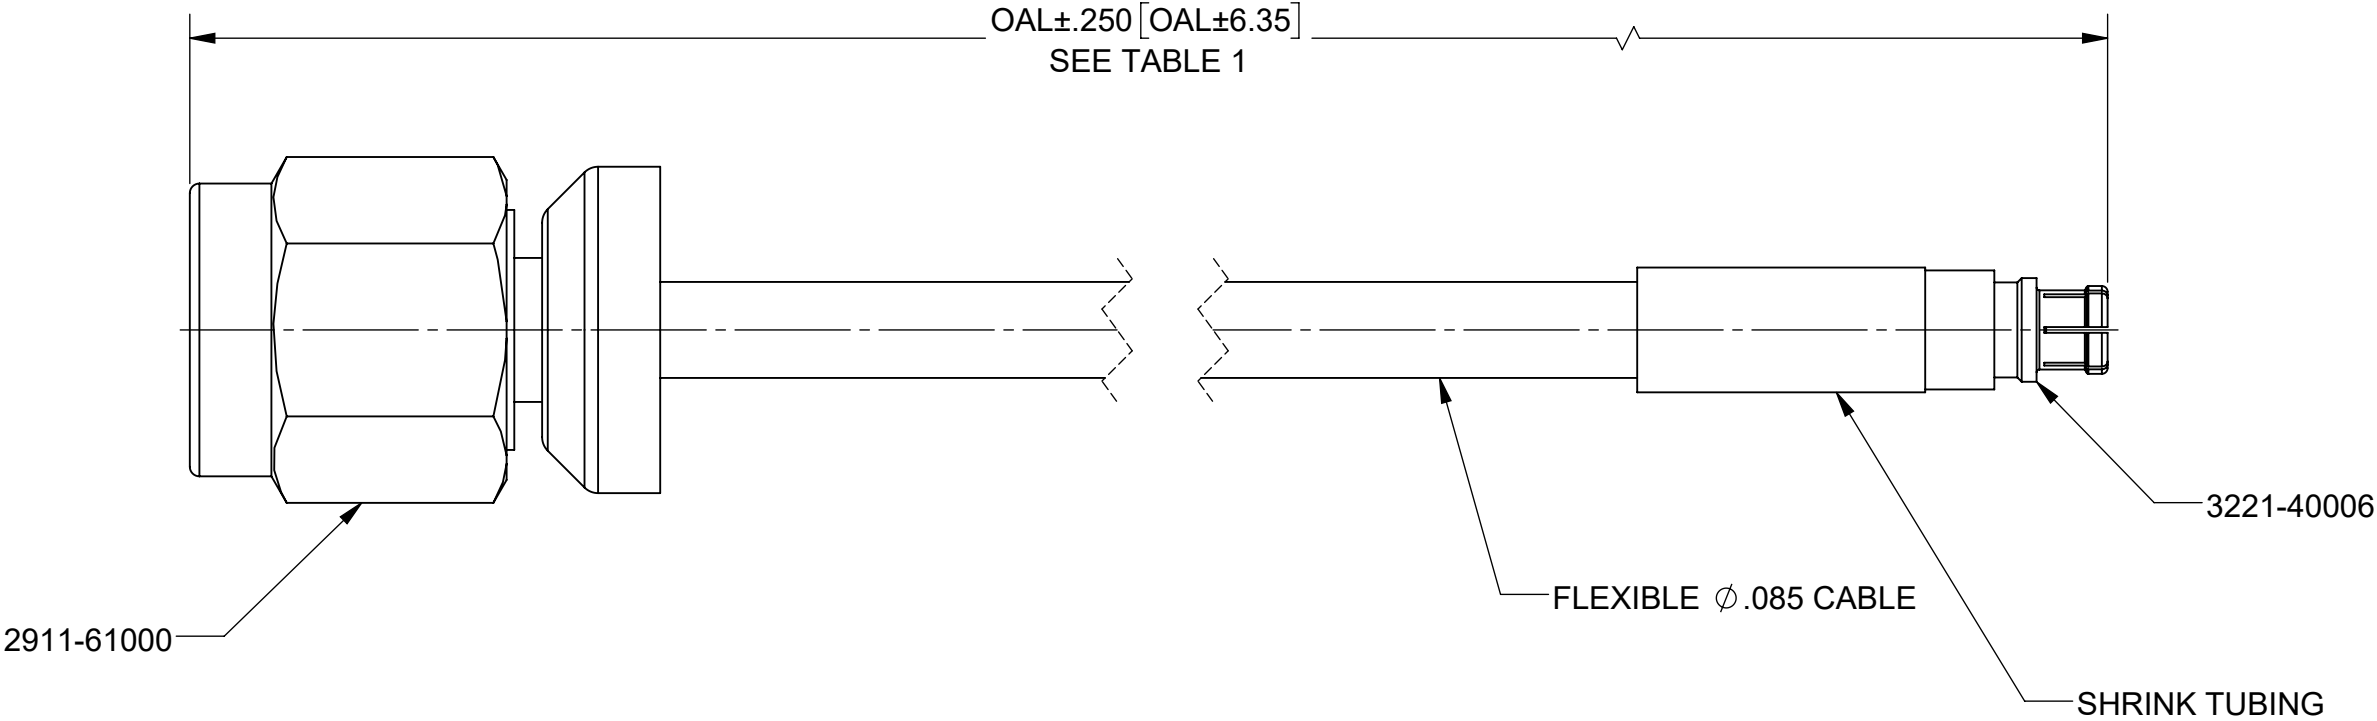
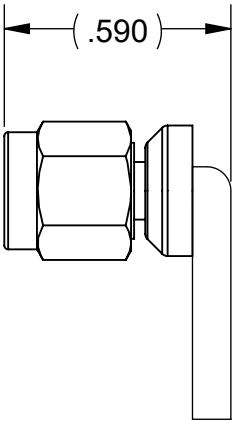


TABLE 1

SV P/N	OAL
7029-3639	6.000"
7029-3640	12.000"

MATERIAL:

CONNECTORS: 2911-61000 (SMA STRAIGHT MALE LOW PROFILE RF)
3221-40006 (SMPM STRAIGHT FEMALE)

CABLE: 200-70-535 (FLEXIBLE Ø.085 CABLE)

SHRINK TUBING: M23053/5 OR EQUIVALENT

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 18 GHz

MATERIAL:	PER BOM	DIMENSIONS ARE IN INCHES TOLERANCES:		UNLESS OTHERWISE SPECIFIED		 www.svmicrowave.com TITLE: SMA STR. M TO SMPM STR. FOR FLEXIBLE Ø .085 CABLE ASSEMBLY SIZE DWG. NO. 7029-3639-3640 SCALE: 5:1 SHEET 1 OF 1	
FINISH:	PER BOM	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' 					