


## PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46856	9/17	FSG

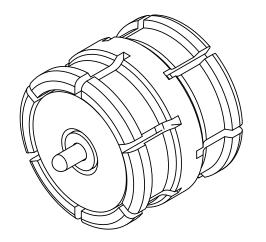

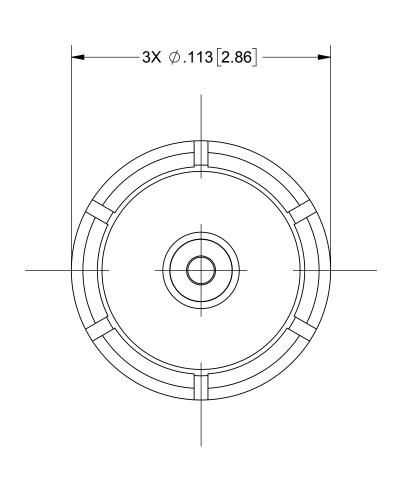

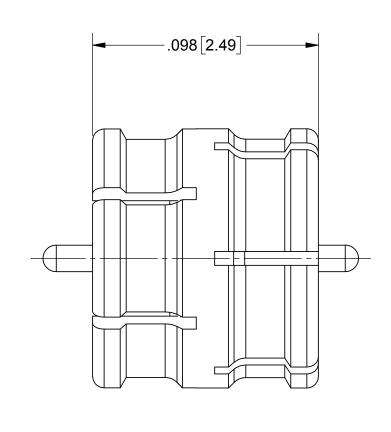

## **MATERIAL:**

BODY &

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 PIN CONTACTS:

CONTACT: BRASS PER ASTM B16, ALLOY UNS No. C36000

**INSULATOR:** PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

**BODY, CONTACT &** 

GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL PIN CÓNTACTS:

PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

MATERIAL:	SEE NOTES
FINISH:	SEE NOTES

SURFACE AREA: N/A

**PROPRIETARY** 

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'

DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

## UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING,
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

APPROVED:

DRAWN: GPF 9/27/17 CHECKED: FSG 9/27/17

FSG 9/27/17



TITLE:

3mm BULLET

SIZE CAGE CODE DWG. NO. B 95077 1180-4009 SCALE: 24:1