


# PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B	DCN 54652	06/24	SEE PDM

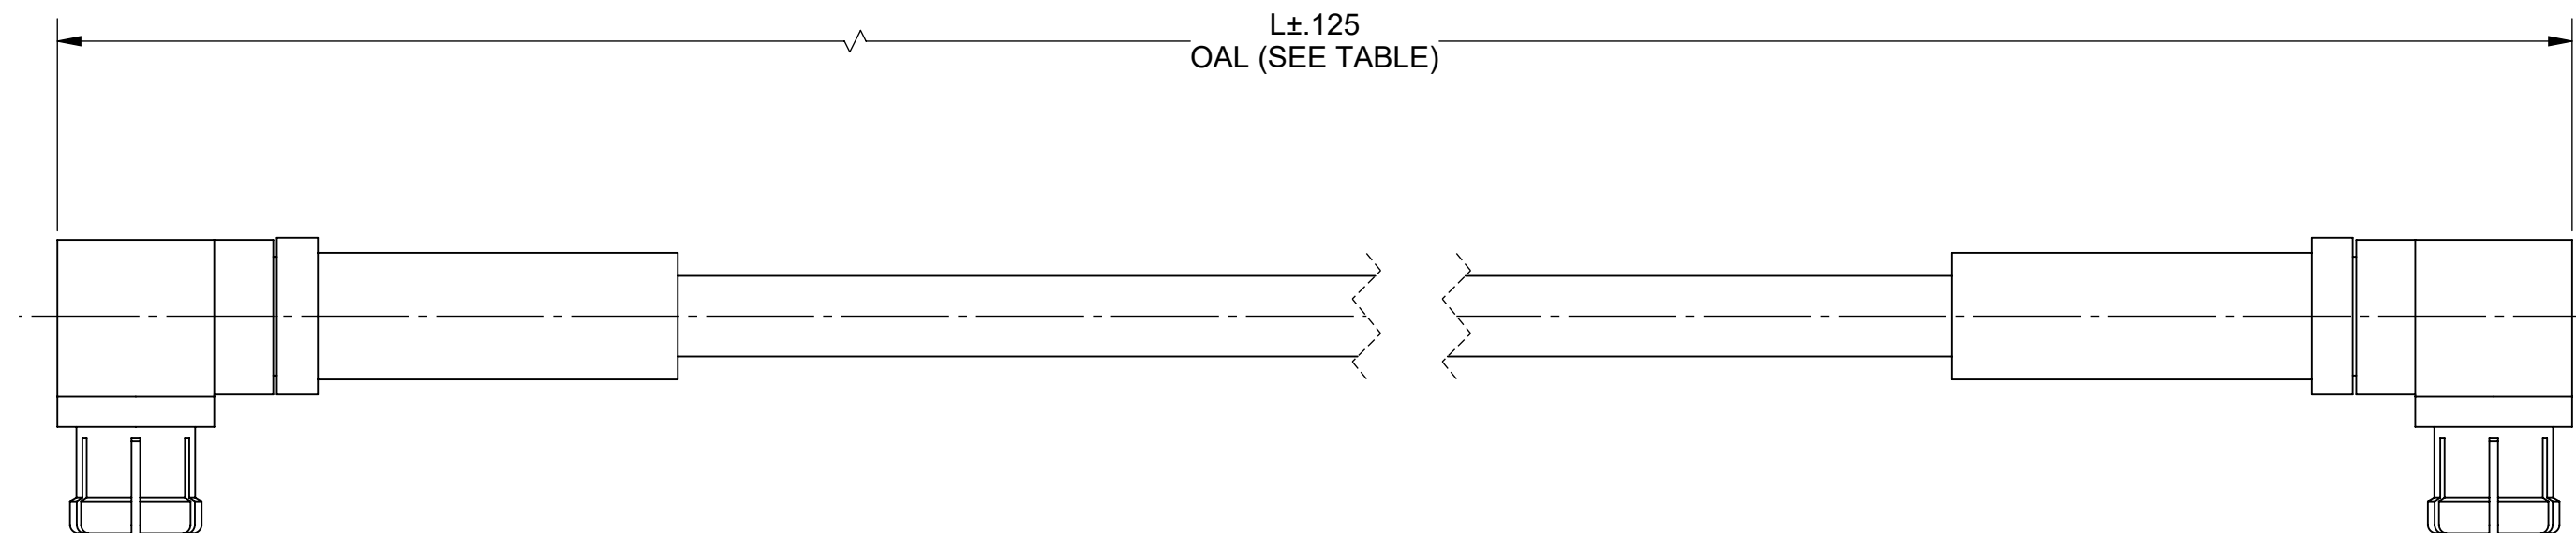



## MATERIAL:

2 SMPM R/A FEMALE CONNECTORS: 3222-40006  
 FLEXIBLE .047 CABLE: 200-70-479  
 SINGLE WALL TUBING: M23053/5 (BLACK)

## PERFORMANCE:

IMPEDANCE: 50 OHMS  
 FREQ. RANGE: DC TO 40.0 GHz  
 VSWR: 1.50:1 DC TO 40.0 GHz  
 INSERTION LOSS: SEE TABLE

SV P/N	L (OAL)	INSERTION LOSS dB MAX.
7032-6354	6.000"	2.17
7032-6355	12.000"	3.60
7032-6356	24.000"	6.43

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1'0''$ X°X' $\pm 15''$	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	 Amphenol www.svmicrowave.com
FINISH: SEE NOTES	DECIMAL: X $\pm .030$ .XX $\pm .010$ .XXX $\pm .005$		
SURFACE AREA: N/A	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	DRAWN: BNK 03/27/14	TITLE: SMPM R/A FEMALE TO SMPM R/A FEMALE FOR FLEXIBLE .047 CABLE ASSEMBLY SIZE DWG. NO. B 7032-6354-6356
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION		
		APPROVED: SEE PDM	SCALE: 2:1